


MPK20R




OVERALL DIMENSIONS

MPK20R

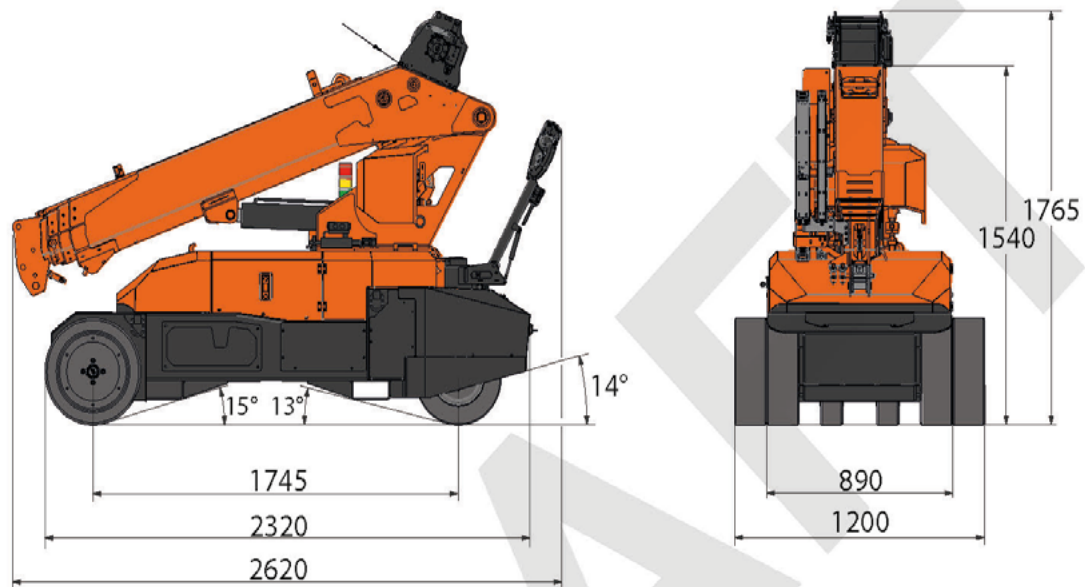

BOOM SWING

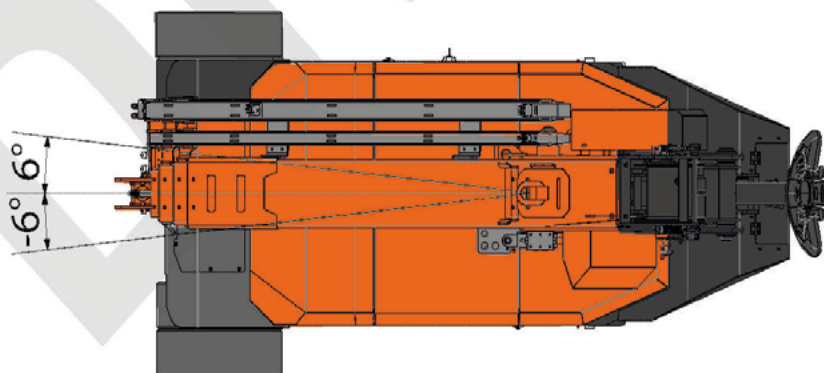

[mm]

OVERALL INFORMATION

CRANE INFO	NAME		DESCRIPTIONS	U.M	VALUE
		OVERALL DIMENSIONS	Height	mm	1.765
			Length		2.620
			Width		1.200
		BOOM	Length	m	2,2 - 6,2
			Speed	s	25
		SLEWING	Angle	°	-6°/6°
			Speed	rpm	-
		LIFTING	Working Angle	°	-20°/60°
			Speed	s	20*
			Max Capacity	kg	2.000
			Back Wheel Max Load	kg	1.100†
			Front Wheel Max Load		1.980‡
			Travel Speed	km/h	-
			Gradeability	°	13
			Working Temperature	°C	-20°/+40°

WEIGHTS		CRANE	MPK20R	kg	1.452§
		COUNTERWEIGHT	CW	kg	500
		CRANE	Total weight	kg	1952

ACCESSORIES		JIB	JIB 1000.GX	kg	18
		GLASS MANIPULATOR	JVM10EV	kg	165
			JVM06EV	kg	110

ENGINE		ELECTRIC	Voltage	V	24
			Power	kW	3

*: Reference Angle 0-50°

†: Without Load

‡: Static lifting. Max column slewing

§: Dry weight

OVERALL INFORMATION

HYDRAULIC SYSTEM		Working Pressure		bar	180
		Tank Capacity		L	31
		OIL	Type	Synthetic	ISO 6743-4:HFDU
				Biodegradable	ISO VG46
			Viscosity Grade	VG	46
		MAIN PUMP	Displacement	cm³/rev	6,4
			Max Oil Flow	L/min	9,1

CRANE PERFORMANCE


STANDARD WINCH	Layer		Max pull line	Standard rope speed
			kg	m/min
	1		1.000*	37
	2		920*	41
	3		850*	45
	4		790*	49
	5		730*	53
ROPE	Wire rope	Max load	Ø	Total length
		kg	mm	m
	19x7 right non rotating lang lay	2.086	7	62

HOOK BLOCK	Block type	Weight	Load	N° of	
		kg	kg	Sheaves	Lines
	Single pulley block	24	2.100	1	3
			1.400	1	2
	Overhaul Ball	40	700	-	1

*: LMI limited at 700 kg

MPK20R - MAIN BOOM

H00K configuration

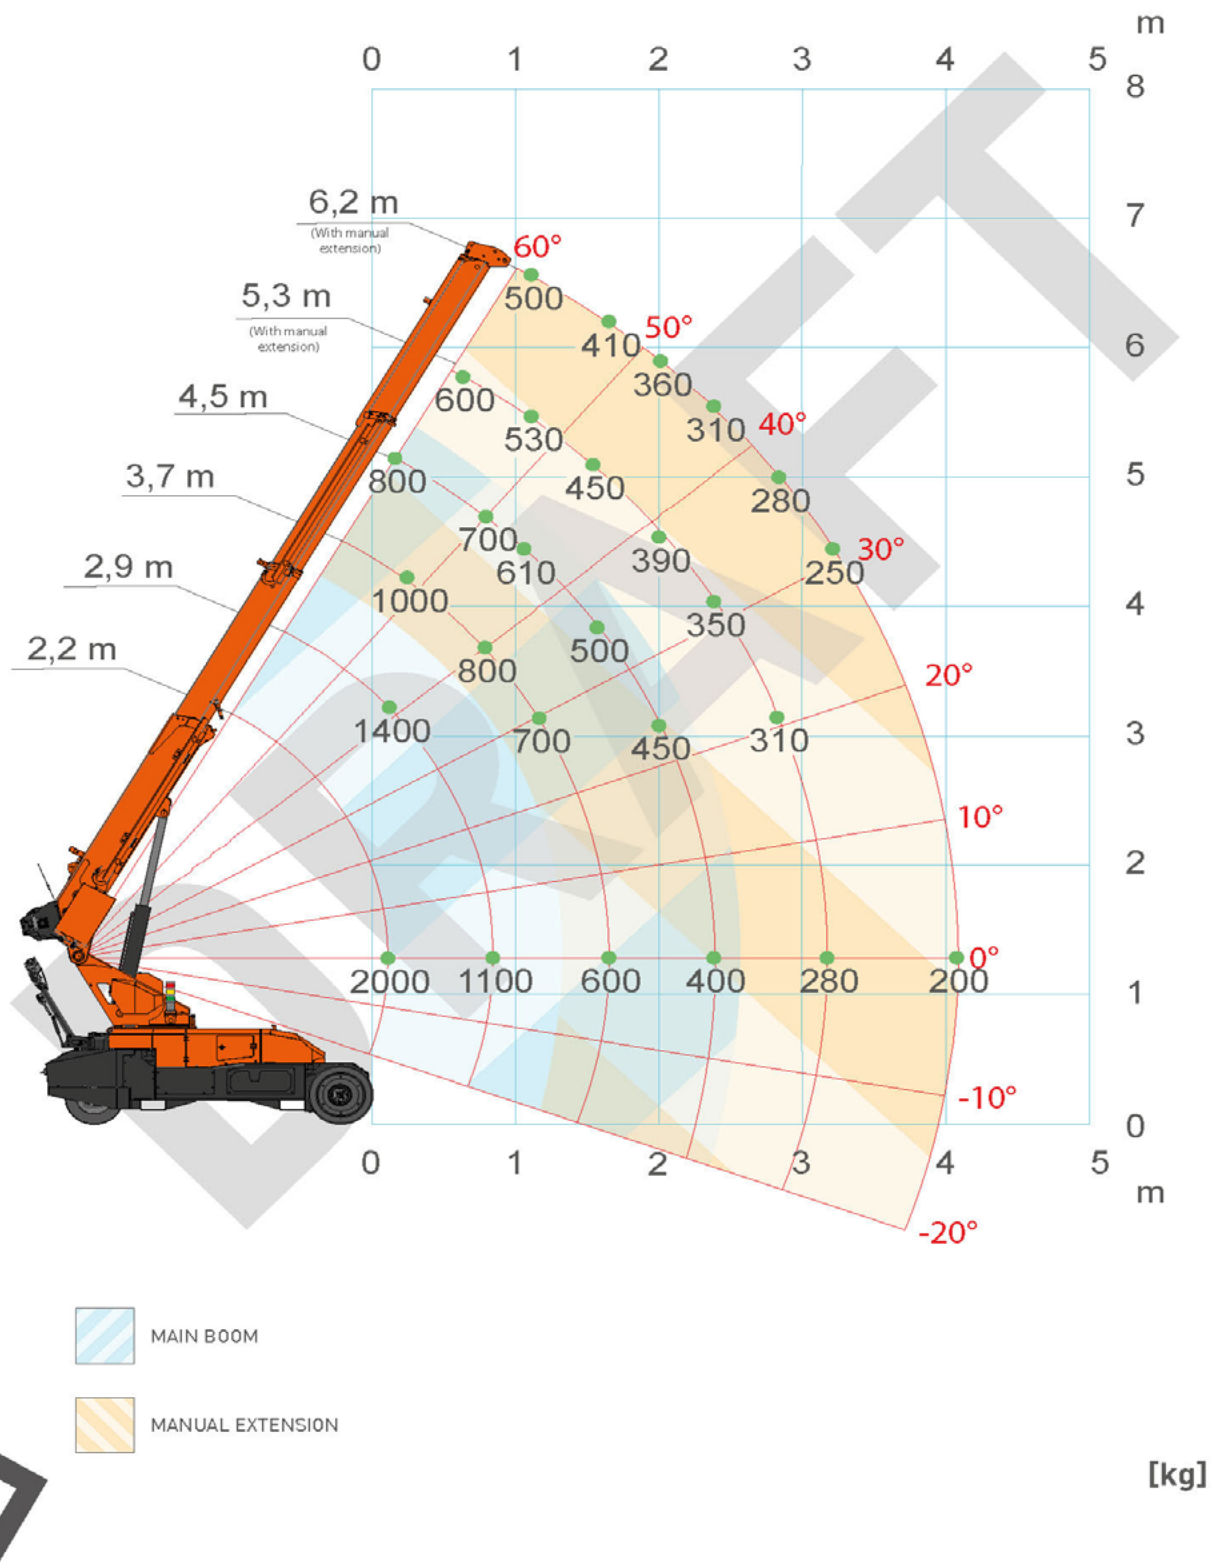


MPK20R - MAIN BOOM

H00K configuration

CRANE PERFORMANCE									
L (m) →	2,2	2,9	3,2	3,7	4,1	4,5	4,9	5,3	6,2
0,1	2.000	1400	1250	1.000	900	800			
0,8		1100	950	800	750	700	650	600	
1,1			850	700	650	610	580	530	500
1,6				600	550	500	480	450	410
2,0					490	450	410	390	360
2,4						400	360	350	310
2,8							330	310	280
3,2								280	250
4,1									200
↑S (m)	kg								

MPK20R - MAIN BOOM

WINCH configuration

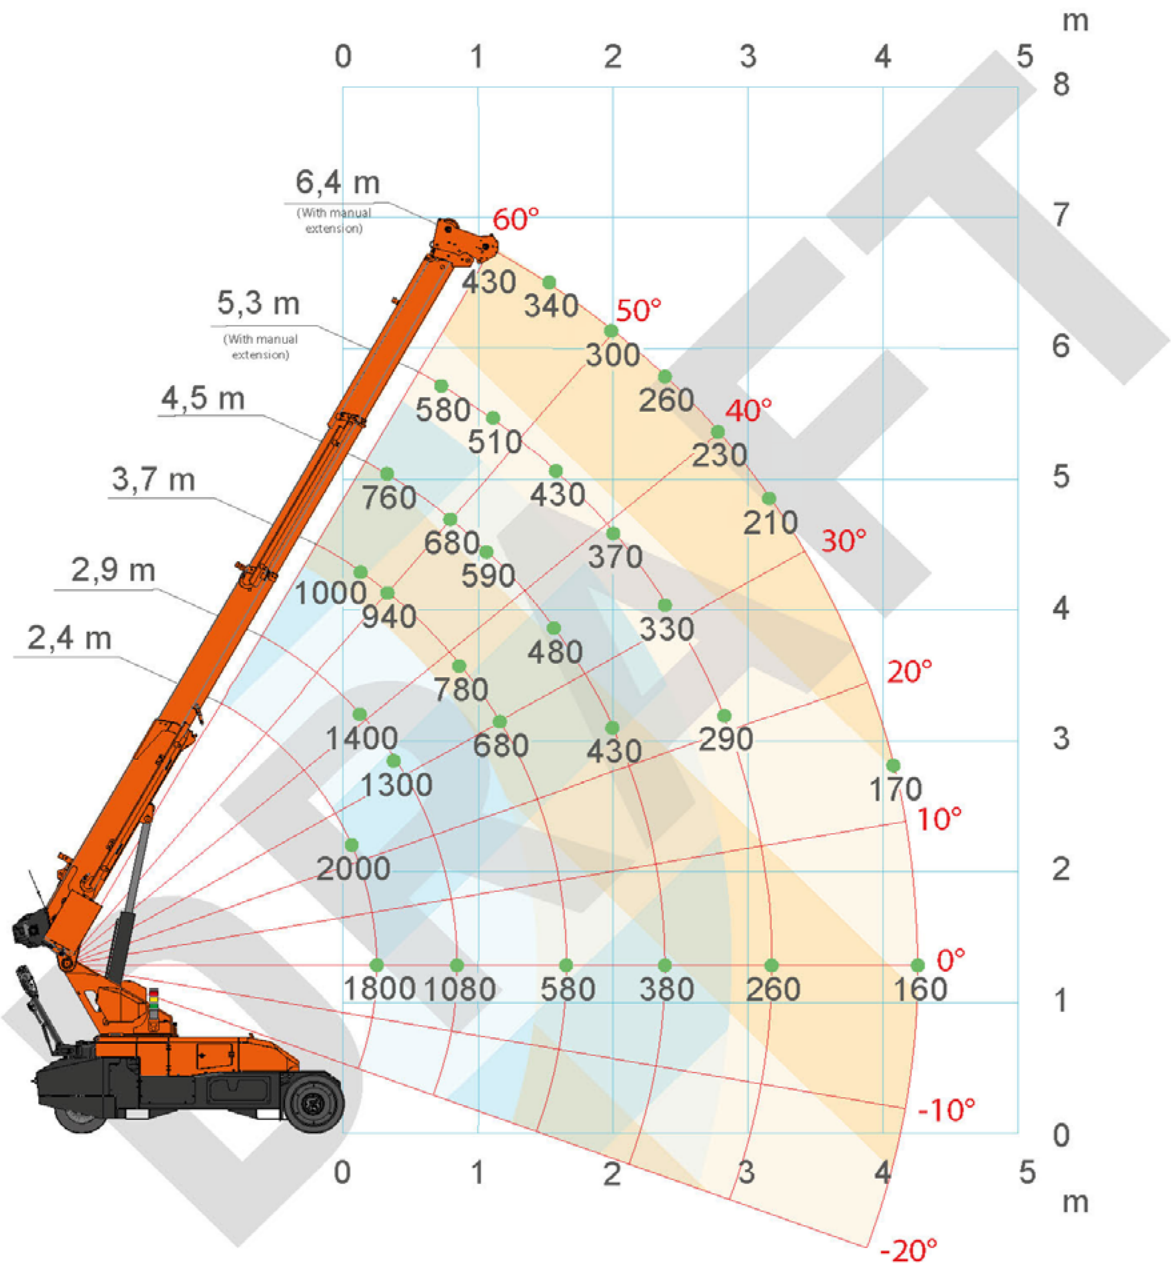

MAIN BOOM



MANUAL EXTENSION

[kg]


MPK20R - MAIN BOOM

WINCH configuration

CRANE PERFORMANCE										
L (m) →	2,2	2,9	3,2	3,7	4,1	4,5	4,9	5,3	6,2	6,4
0,1	2000	1400	1230	1000	900					
0,3	1800	1300	1150	940	850	760				
0,8		1080	930	780	730	680	630	580		
1,1			830	680	630	590	560	510	480	430
1,6				580	530	480	460	430	390	340
2,0					470	430	390	370	340	300
2,4						380	340	330	290	260
2,8							310	290	260	230
3,2								260	230	210
4,1									180	170
4,3										160
↑S (m)	kg									

MPK20R - JIB 1000.GX

H00K configuration

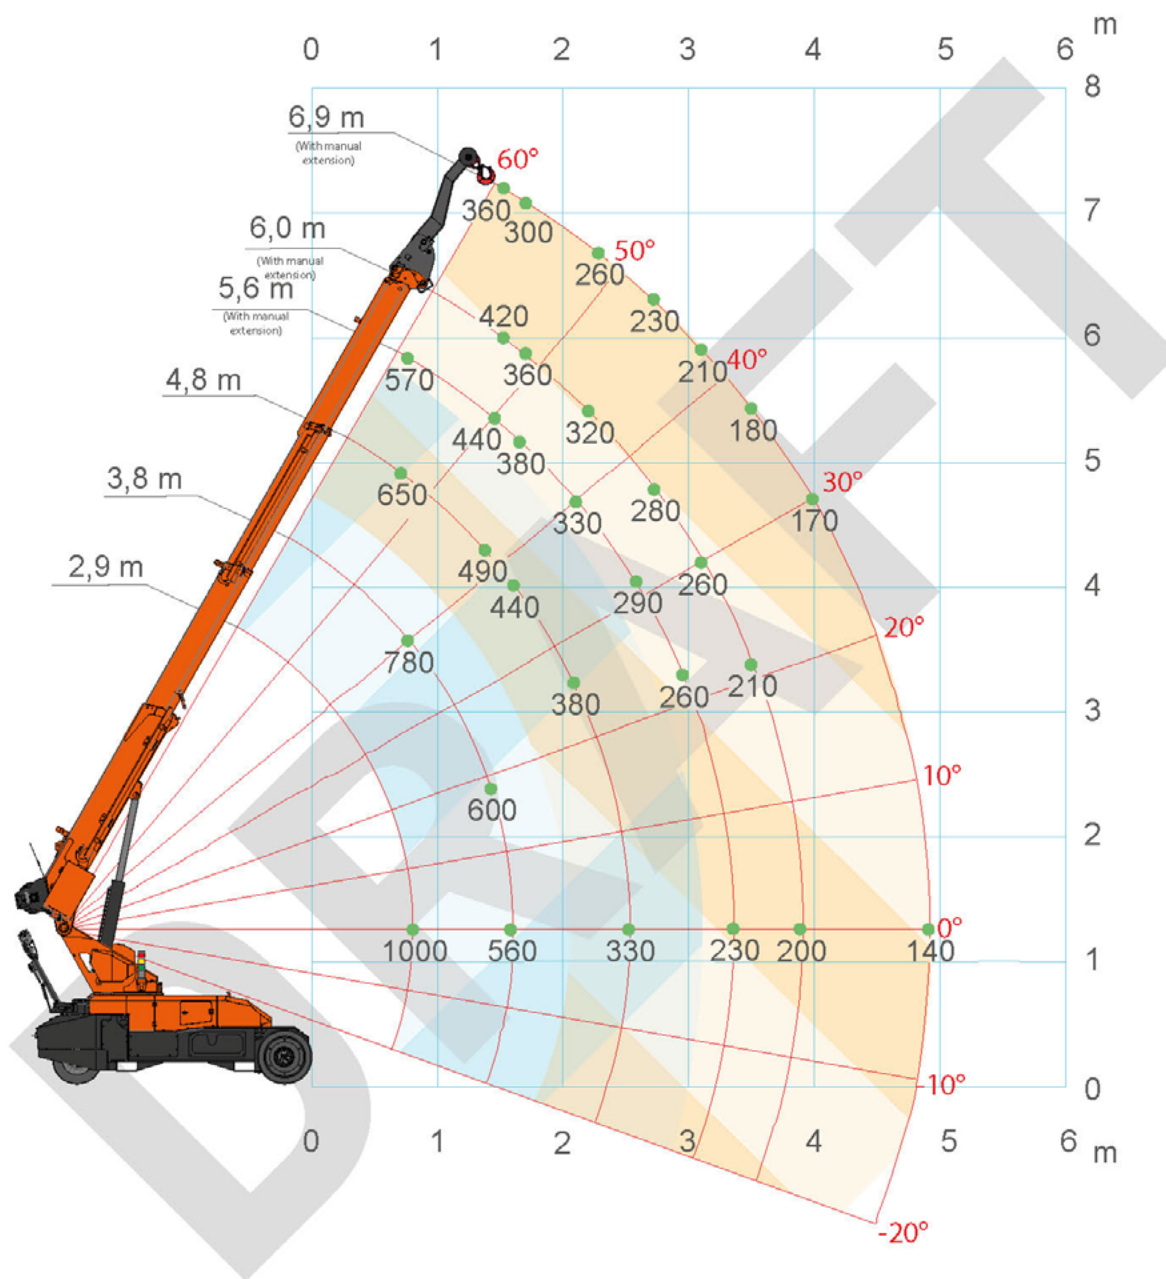

MAIN BOOM



MANUAL EXTENSION

10


[kg]

MPK20R - JIB 1000.GX

H00K configuration

CRANE PERFORMANCE									
L (m) →	2,9	3,6	3,8	4,3	4,8	5,2	5,6	6,0	6,9
0,8	1000	820	780	710	650	600	570		
1,5		640	600	530	490	460	440	420	360
1,7			560	490	440	400	380	360	300
2,2				430	380	350	330	320	260
2,7					330	310	290	280	230
3,1						280	260	260	210
3,5							230	210	180
3,9								200	170
4,8									140
↑S (m)	kg								

ACCESSORIES FEATURES JIB1000.GX

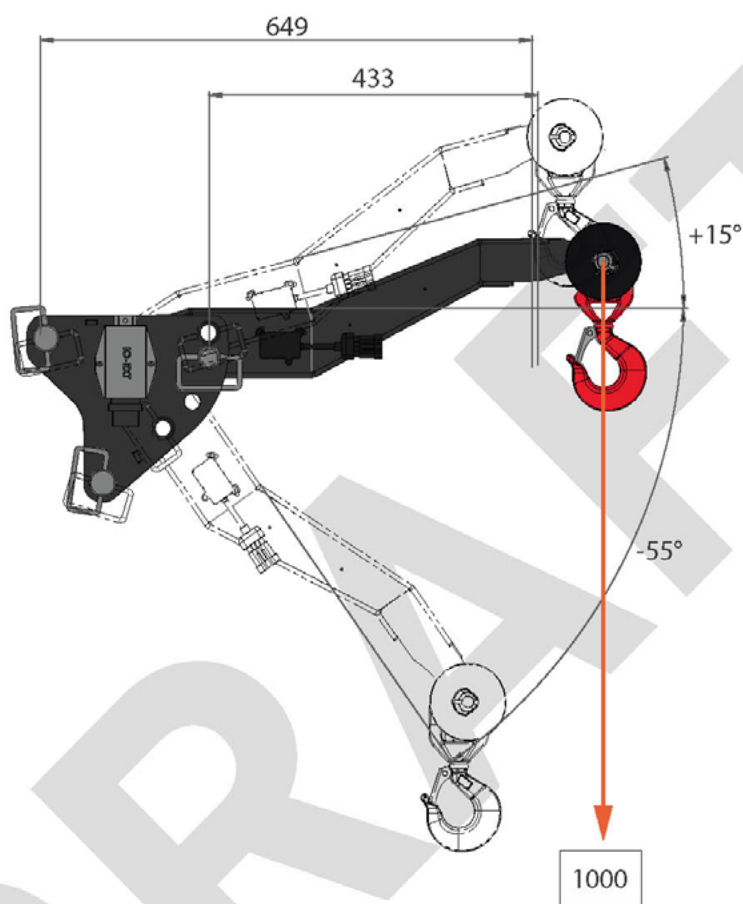

	JIB	JIB1000.GX	kg	18
---	-----	------------	----	----

SYMBOLS

	Weight		Electric Engine		Minipicker		Boom Angle
	Max Capacity		Hydraulic Oil		Back Wheel Loading Point		Boom Length
	Gradeability		Working Temperature		Front Wheel Loading Point		Slewing
	Jib		Glass Manipulator		Travel Speed		

REMARKS REFERRING TO LOAD CHART

- The load charts are calculated according to EN 13000.
- For the calculation of the load charts at least a wind speed of 9m/s (33km/h) and regarding the load a sail area of 1m² per ton load and a wind resistance coefficient of 1.2 on the load have been taken into account. For lifting of loads with large sail areas and/or high wind resistance coefficients the maximum wind speed as stated in the load charts has to be reduced.
- Lifting capacities are given in kilograms.
- The weight of the hook blocks and hooks is part of the load and therefore it must be deducted from the lifting capacities.
- Working radii are measured from the slewing centre.
- The lifting capacities given for the telescopic boom apply if the folding jib is removed.
- Subject to modification of lifting capacities.

Wir heben ihre Leistung!



Pfalzlift Haßloch
Langgasse 93, 67454 Haßloch
Telefon: +49 6324 80577
Telefax: +49 6324 5930025
info@pfalzlift.de
www.pfalzlift.de



Alle technischen Angaben unter
Vorbehalt nach Datenstand 08.2019.